



SingleMag™ Polymer



- California Approved (CTEP)
 - Both HOT & COLD
- National Approved (NTEP)
 - Both HOT & COLD
- NSF-61-G
- Meets AWWA C712-10
- Pulse output

The SingleMag™ 3/4" water meter is a durable, highly accurate meter that comes equipped with a pulse output in a compact design. The Polymer composite material consists of a 50% nylon blend that has high strength with good rigidity.


FEATURES: Magnetic drive, low torque register measuring in gallons. Register is also magnet resistant and dry to prevent from moisture intrusion. Finger strainer installed to protect the meter from any incoming debris. Rugged design for stable accuracy in aggressive environments. Horizontal installation only.

PULSE OUTPUT: Pulse output (contact closure) to interface with almost any wireless transmitter or remote metering device.

MEASURING CHAMBER: .25 gpm low flow. Wide effective flow range. Dry free rotating register in durable enclosure.


Technical Characteristics

Max Flow Rate	22 gpm
Nom Flow Rate.....	11 gpm
Min Flow Rate(+/- 3%).....	¼ gpm
Max Work Pressure.....	150 psi
Max Work Temp	105° F (Cold), 160° F (Hot)
Nom Pipe Size.....	¾"
Pulse Value.....	1/10gal

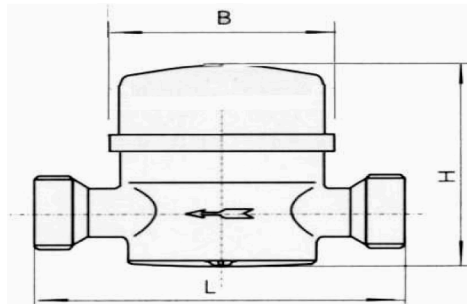

TYPE	SIZE	L	B	H	CONNECTION	WEIGHT
Single Jet	22 gpm	5"	3"	3½"	¾"	1.5lbs.

Accuracy Chart

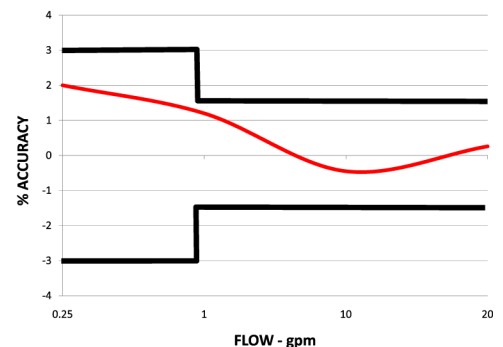

“The SingleMag Water Meter is an accurate, reliable, cost effective solution for residential utility billing.”