



300 SERIES

- Switch adjustment ranges from 3 psig to 30 psig through 450 psig to 4,600 psig
- Standard zinc-plated steel with NBR diaphragm (< 225 psig); steel piston with NBR seal (> 225 psig) wetted parts
- SPDT single changeover contact configuration
- RoHS compliant


SPECIFICATIONS

Switching parameters	
Number	1
Function	SPDT, micro switch
Contact rating	Up to 28 Vdc 2A Up to 125 Vac 4A Up to 250 Vac 4A
Non-repeatability	±2% of full scale adjustment range
Contact material	Silver-plated
Frequency	Max. 100 cycles/min
Media	Diaphragm type, compressed air or not corrosive liquids Piston type, self lubricating fluids such as hydraulic oil or grease
Pressure ranges	
	3 psig to 30 psig through 450 psig to 4,600 psig Diaphragm type: 870 psi max.; Piston type: 5,000 psi max.
Switch adjustment	
Switch point	Full scale
Hysteresis	Adjustable, see Charts below
Durability	>1,000,000 cycles
Temperature ranges	
	Media -4 °F to 176 °F (-20 °C to 80 °C) Ambient -4 °F to 176 °F (-20 °C to 80 °C) Storage -4 °F to 176 °F (-20 °C to 80 °C)
Proof pressure	870 psig or 5,000 psig depending on adjustment range
Measuring element	NBR diaphragm < 225 psig; steel piston with NBR seal > 225 psig 1/4" NPT zinc-plated steel standard connection, others available on request
Housing material	Zinc-plated steel
Environmental rating	IP65
Weight	Approximately 0.2 lb.


APPLICATIONS

- Hydraulics & pneumatics
- Pumps & compressors
- Tank monitoring
- Leak detection
- Water management

Adjustable Hysteresis (piston type)

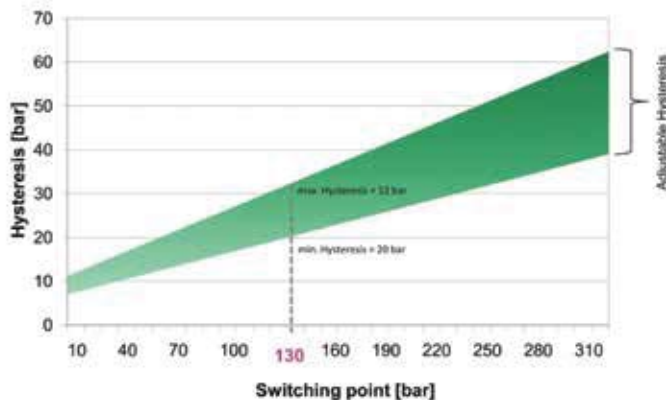

Adjustable Hysteresis (membrane type)

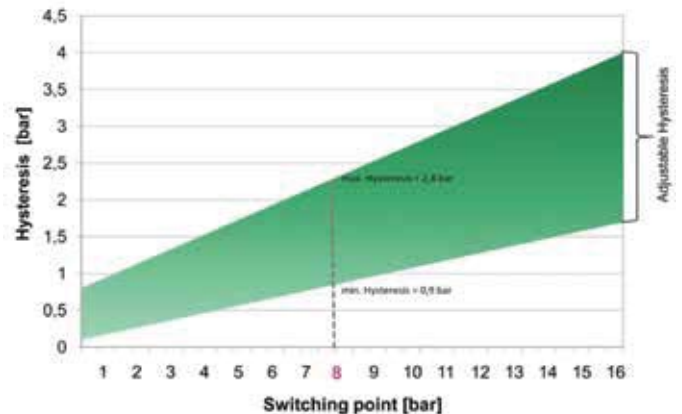


ORDERING INFORMATION					
SERIES	300				
SWITCH FUNCTION	1 Single changeover contact, SPDT				
PROCESS CONNECTION	2 1/4" NPT male				
SWITCH ADJUSTMENT RANGES <i>(Max. working pressure)</i>	3/30	3 psig to 30 psig (870 psig)	150/1700	150 psig to 1,700 psig (5,000 psig)	
	7/115	7 psig to 115 psig (870 psig)	150/2300	150 psig to 2,300 psig (5,000 psig)	
	15/225	15 psig to 225 psig (870 psig)	300/2900	300 psig to 2,900 psig (5,000 psig)	
	150/425	150 psig to 425 psig (5,000 psig)	300/3600	300 psig to 3,600 psig (5,000 psig)	
	150/1150	150 psig to 1,150 psig (5,000 psig)	450/4600	450 psig to 4,600 psig (5,000 psig)	
ELECTRICAL CONNECTIONS	1 36" Cable (connected to option 8)		8 Hirschmann (DIN EN 175301-803 form A)		

Please consult your local NOSHOK Distributor or NOSHOK, Inc. for availability and delivery information.

EXAMPLE

Series 300 Series
 Switch function.....Single changeover contact
 Process connection 1/4" NPT Male
 Adjustable range 15 psig to 225 psig
 Electrical connectionHirschmann

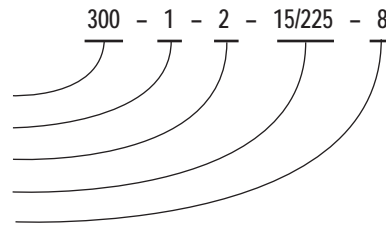

Additional Ordering Information
 Switch Set Point(s) (please specify)

Switching Output Schematic

